

SERVOREELER SYSTEMS

XEDIT Corporation

218-31 Ninety Seventh Avenue

Queens Village, New York 11429

Web site: www.servoreelers.com

e-mail: srsystems@servoreelers.com

Tel: (718) 464-9400 Fax: 464-9435

BZ-3 Preliminary Instructions

The new BZ-3 Ceiling Bezel is designed to accept the Polycom - HDX Multi capsule ceiling microphone. Please refer to the normal Bezel instruction sheet for general Bezel installation instructions.


Please examine the following photos for reference.




Strap Clamp



Microphone – Slide / Magnet carrier / dust cap

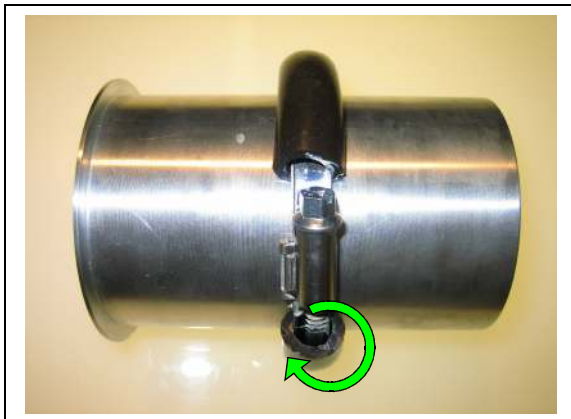

Rolling the strap clamp onto the Bezel

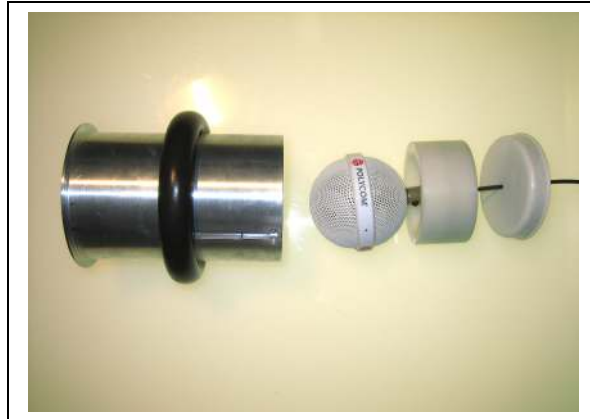

BZ-3 showing entry sequence of components

- 1- The hole size for the BZ-3 is 2.625"
- 2- The normal aluminum clamp has been replaced with a cushioned strap clamp.
- 3- The strap clamp is best installed by evenly pushing it onto the top of the BZ-3; rolling the black tubing material; without opening the clamp. The tubing will basically "roll" onto the barrel of the BZ-3. (Please see photo above)
- 4- With someone pushing the bezel tightly against the ceiling from inside the room, push and "roll" the closed strap clamp down tightly against the ceiling material; then tightening the clamp in place. Make sure that the Bezel is pulled tightly to the ceiling and that the clamp is firmly tight.

NOTE: The white bezel slide/magnet carrier is stored inside the BZ-3 body for shipping. It is retained at the flange end by a retaining ring, but can slide out the top. Take care when unpacking not to let the "slide" fall out and possibly be damaged. Prior to assembly as shown above, insert the magnet carrier into the bezel and make sure that it free to move inside the bore. Clean the bore so that it is free of any debris.

Please call us if you have any questions: 800-431-8900