


SERVOREELER SYSTEMS

XEDIT Corporation

218-31 Ninety Seventh Avenue
Queens Village, New York 11429
Web site: www.servoreelers.com
E-mail: srsystems@servoreelers.com
Tel: (718) 464-9400 -Fax: 464-9435

TRAPEZE SYSTEM

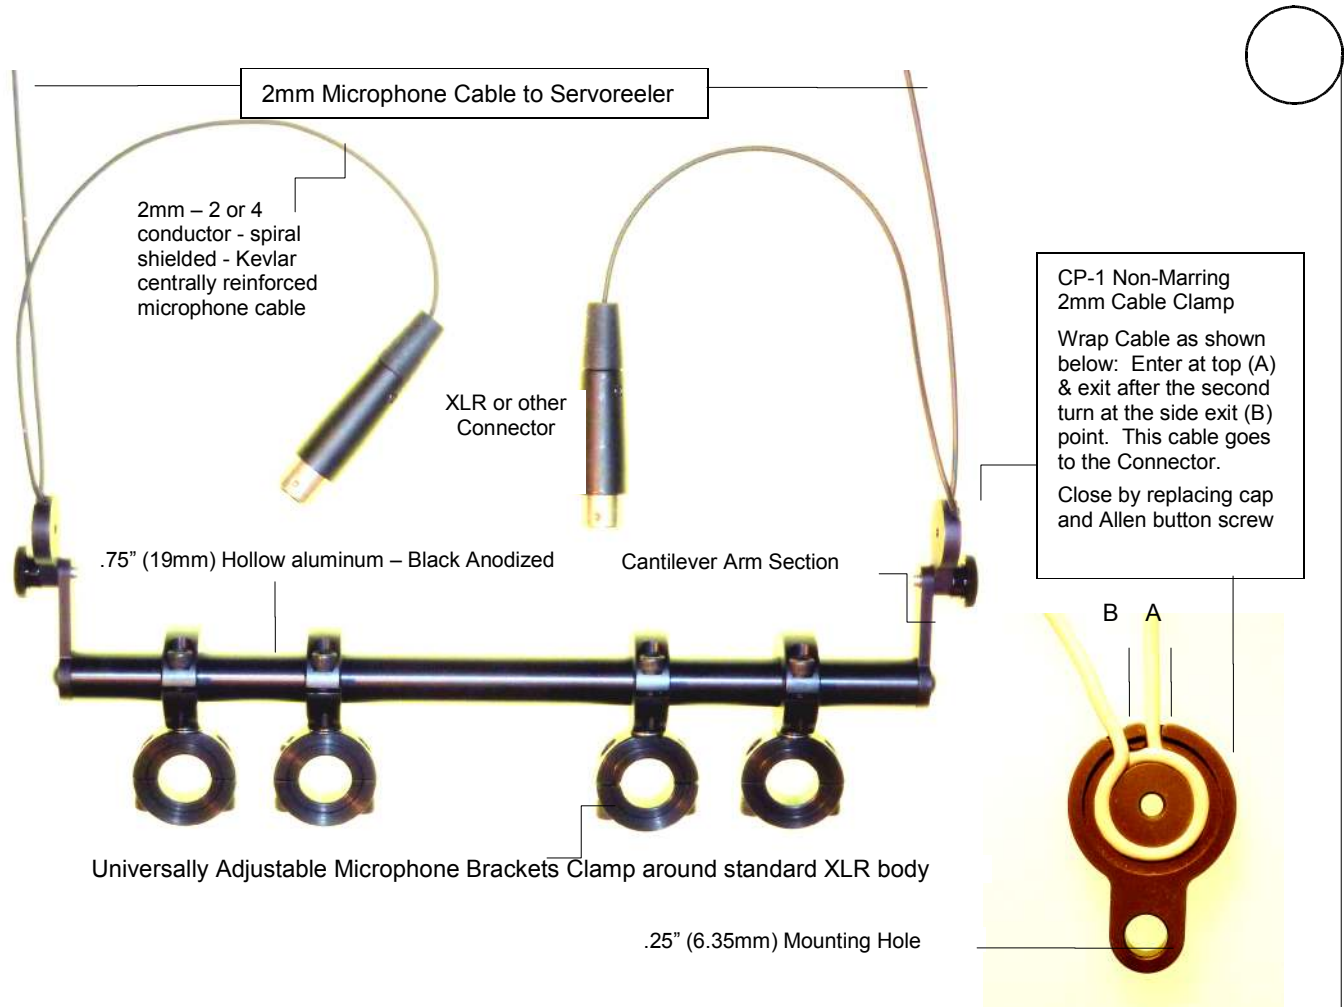

The Trapeze bar is normally deployed by two Servoreelers. Each of the Servoreelers can employ four conductor microphone cable and thereby support a total of four microphones, as shown above; or more commonly a microphone pair.

CP-1 Non-Marring Cable Clamp: Please refer to attached CP-1 instruction sheet for details.

Universal Brackets

Clamp around the microphone XLR shell. Swivel and rotate the bracket to aim the microphone. Lock in position using a 3/36" Allen wrench.

CAUTION Carefully check that all fasteners are tight and secure to assure safe overhead operation.

Cantilever Arm Adjustment

This segment provides a means of compensating for any off center weight of the microphones. Adjust the offset of this arm so the trapeze hangs straight from the support cables after the microphones are set to their final positions.

Please contact us if you have any questions: 800-431-8900 718-464-9400